

The MV-2 Valve (Manifold) is an integrated control assembly designed for control panel mounting in a truck-tractor. This non-metallic assembly consists of two push-pull valves and a dual circuit supply valve. It provides all the federal legal requirements for trailer air supply and parking brake control plus an additional feature permitting the tractor parking brakes to be applied while air is supplied to the trailer.


The MV-2 is serviced by replacement of the complete spool insert. Refer to the schedule of piece numbers.

For complete service/maintenance information, see service data sheet SD-03-71.

Maintenance kit for dual circuit supply valve is Pc. No. 101557.

Weight - 2 lbs. 7 oz.

VMRS No. 13-010-112

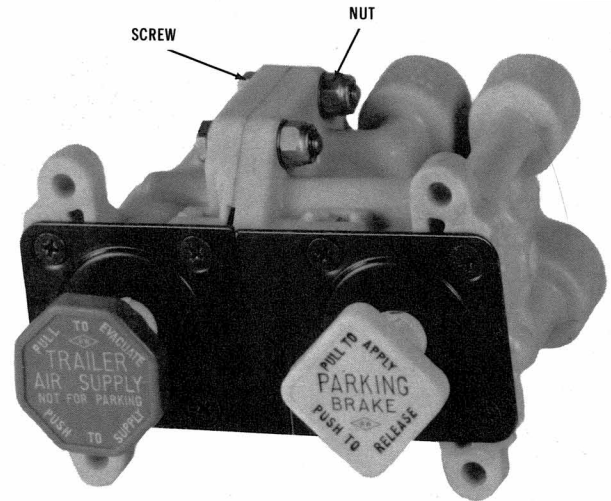

SUB ASSY AND DETAIL REFERENCE


MV-2 CONTROL MODULE PC. NO.	FOR SERV. REPLACEMENT USE PC. NO.	CUSTOMER IDENTIFICATION	VALVE	SPOOL ASSY.	PIN (INCLUDED W/SPOOL ASSY.)	BUTTON (NOT INCLUDED W/SPOOL ASSY.)	BUTTON COLOR	C DIM'N. (IN.)	SCREW	NUT
101437	101437	NONE	A	101569	238379	293510	RED	1.44	210312*	230401*
			B	101570	238379	293511	YELLOW			
101438	101846	79101-0010 (WHITE)	A	101569	238379	293557†	RED	1.18	293474**	239295**
			B	101570	238379	293876††	YELLOW			

† — SIMILAR TO BUTTON 293510.


†† — SIMILAR TO BUTTON 293511.

*FOUR (4) REQ'D.

**ONE (1) EA. REQ'D. PLUS THREE (3) EA. of 210312 & 230401.

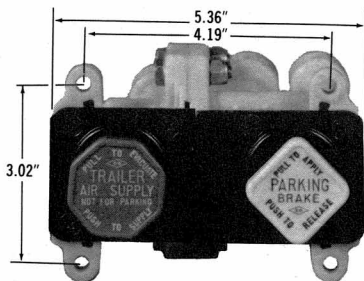

TOP VIEW

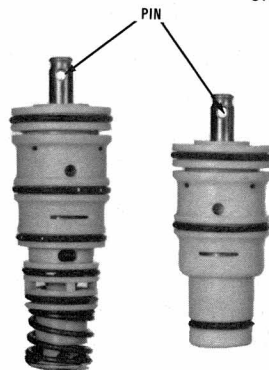


SPOOL ASSY. 101569 SPOOL ASSY. 101570



BUTTON 293510 (RED)



BUTTON 293511 (YELLOW)

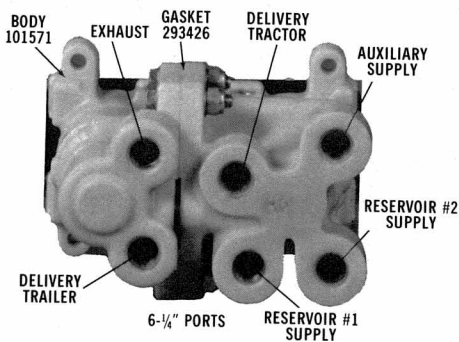

BOTTOM VIEW

