



Bendix-leading the way in engineering and development of application specific products.

All Bendix® linings meet or exceed FMVSS121.


Our Gold FF is specifically engineered to provide a maximum life, premium all-makes lining for single axles up to a maximum of 23,000 lbs., and tandem axles up to a maximum of 46,000 lbs. G.A.W.R., using standard 16.5" x 7" brakes with 165 or 180 AL factors as specified in the chart below.

For steer axles, Gold is engineered to provide a maximum life, premium all-makes lining for up to a maximum of 25,000 lbs. G.A.W.R., using standard 16.5" x 10" brakes with 180 AL factor as specified in the chart below.

Gold high-friction Aramid polymer fibers are designed to handle the high heat of bus service or the long grades of mountain terrain.



Gold FF Lining

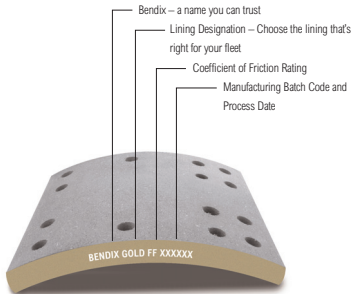

Applications:

Heavy line haul
Heavy vocational
Bus

Notes:

Aramid polymer fibers
Available on standard shoes
High torque capacity
Superior friction and drum life
Superior stopping power

Market Competition:

Meritor R302
Carlisle MB23
BrakePro CM22A-1
Marathon FLOE
GreyRock 2020
Abex 685, 697
Fras-le 557

Size	FMSI	AL Factor	Rolling Radius	Max. G.A.W.R. Single/Tandem	Shoe Type	Bendix Friction
16.5" X 10"	4552	180	21.1"	25k	DAP	GOLD FF
16.5" X 5"	4524	132	21.1"	14.6k	DAP	GOLD FF
16.5" X 6"	4514	132	21.1"	16k	DAP	GOLD FF
16.5" X 7"	4515	165 / 180	21.1"	23k / 46k	DAP	GOLD FF
16.5" X 7"	4311	165 / 180	21.1"	23k / 46k	SAP	GOLD FF