



Bendix-leading the way in engineering and development of application specific products.

All Bendix® linings meet or exceed FMVSS121.


Our Green FF is engineered to provide an economical lining for single axles up to a maximum of 17,000 lbs., and tandem axles up to a maximum of 34,000 lbs. G.A.W.R., using standard 16.5" x 7" brakes with 165 or 180 AL factors as specified in the chart below.

Green handles loads with consistent brake performance when used with conventional brake shoe designs.

Best suited for tractor, trailer, and straight truck applications, Green is designed with a uniquely formulated medium low-friction organic compound for on highway applications and city pick-up & delivery.



Green FF Lining

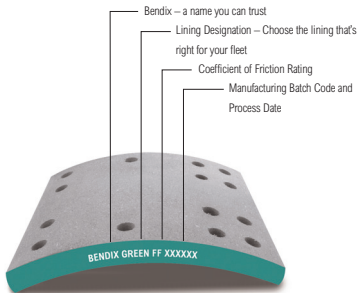

Applications:

Line haul
Straight trucks

Notes:

Available on standard shoes
Medium torque capacity

Market Competition:

GreyRock NP
Carlisle MB17, NA100
Abex 6014
BrakePro CM15, CM14
Fras-le 540
Marathon UB, MH

Size	FMSI	AL Factor	Rolling Radius	Max. G.A.W.R. Single/Tandem	Shoe Type	Bendix Friction
16.5" X 7"	4311J	165 / 180	21.1"	17k / 34k	SAP	GREEN FF
16.5" X 7"	4515G	165 / 180	21.1"	17k / 34k	DAP	GREEN FF